

# SRP-350plusIII

3 inch POS printer



Retail



Restaurants & Bars




Ticketing



Kiosk

# The perfect fit for mPOS solutions

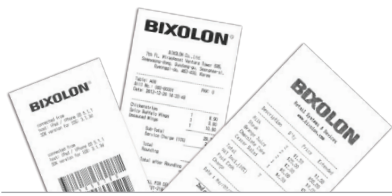

## High-quality Printing Performance

- Fast printing up to 300mm/sec (20% faster than the SRP-350plusII)
- Cost-saving paper reduction function (Barcode reduction included)
- 16-step true gray scale printing of graphics
- Proven-reliability as a family of steady-selling SRP-350 line



## World-class Flexibility

- Compatible with smart device including iOS, Android, and Windows
- Built-in USB and Ethernet
- Dual-band WLAN (2.4GHz and 5GHz)
- Bluetooth 5.0 (MFi certified)

## User-friendly Design

- Anti-jam guide
- Stand-alone or Space-saving wall-mount use
- 2" or 3" paper choice



# SRP-350plusIII

3 inch POS printer

## Specifications

### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

SRP-350plusIII: Up to 300 mm/sec  
SRP-352plusIII: Up to 270 mm/sec

**Print Resolution**

SRP-350plusIII: 180 dpi  
SRP-352plusIII: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Paper Near End, Cover Open

### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm  
Optional 58 mm

**Media Roll Diameter**

Up to 83 mm

**Media Thickness**

0.05 ~ 0.08 mm

**Supply Method**

Easy Paper Loading

### Physical Characteristics

**Dimensions (W x D x H)**

145 x 200 x 146 mm  
(5.70 x 7.87 x 5.74 inch)

**Weight**

1.56 kg (3.43 lbs.)

**Electrical**

EnergyStar Certified,  
External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (via y-type adaptor)

### Performance Characteristics

**NV Image Memory**

768 Kbytes (mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

Standard: USB V2.0 FS + Ethernet  
Optional: USB V2.0 FS + Ethernet + Serial /  
Parallel / WLAN<sup>1</sup> / Bluetooth<sup>2</sup> /  
Powered USB

WLAN: 802.11a/b/g/n (Infrastructure, Ad-hoc,  
Wi-Fi Direct, SoftAP) - WEP40/104,  
WPA1/2 (PSK, EAP)

Bluetooth: V5.0 (MFi certified)

### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)  
Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH  
Storage: 10 ~ 90% RH

### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver, OPOS / JPOS Driver,  
Linux / Mac CUPS Driver,  
Virtual COM USB / Ethernet Driver,  
Utility Program

**SDK / Plugin**

Android / iOS / Windows SDK, Linux SDK,  
Windows Runtime SDK, Xamarin SDK,  
Chrome SDK, Cordova Plugin

**Application**

mPrint App (iOS), mPrint Server (Windows, iOS)

**MDM**

BIXOLON Profile Manager  
- XPM™, XCM™ (Windows, Android)

### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24  
KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-350plusIII: Font A: 42 Font B, C: 56  
KOR, CHN, JPN: 21

SRP-352plusIII: Font A: 48 Font B, C: 64  
KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95  
Extended Graphics: 128 x 35 page  
International: 32

**Graphics**

Supporting user-defined fonts, graphics,  
formats, and logos

**Barcode Symbologies**

1D: Codabar, Code 39, Code 93, Code 128,  
EAN-8, EAN-13, ITF, UPC-A, UPC-E  
2D: Data Matrix, PDF417, QR code

### Accessories

**Standard**

Cable-DK Gender

**Optional**

Built-in SMPS, Vertical stand, Wall mount,  
Splash Proof Cover, External buzzer,  
B-Melodist, DK Gender, USB A-B Cable 1.8m,  
Powered USB (0.5/1.2m),  
Serial Cable (9-9/25-9pin), Parallel Cable

